



Roof trim

Molded headliner with sunroof, removing and installing

CAUTION!

***Before working on electrical system,
disconnect battery Ground strap.***

Removing

Notes:

- ◆ *Before disconnecting the battery, obtain radio anti-theft code.*
 - ◆ *Depending on vehicle equipment, variations of the removing and installing procedure must be considered.*
- Remove upper A-pillar trim ⇒ [page 70-27](#) .
 - Remove upper trim C/D-pillar trim ⇒ [page 70-41](#) .




Removing upper B-pillar trim

A

- Unclip upper trim -1- at -B-pillar first at the sides, then at the upper area.

2 - Seat belt

Removing handles (roof)

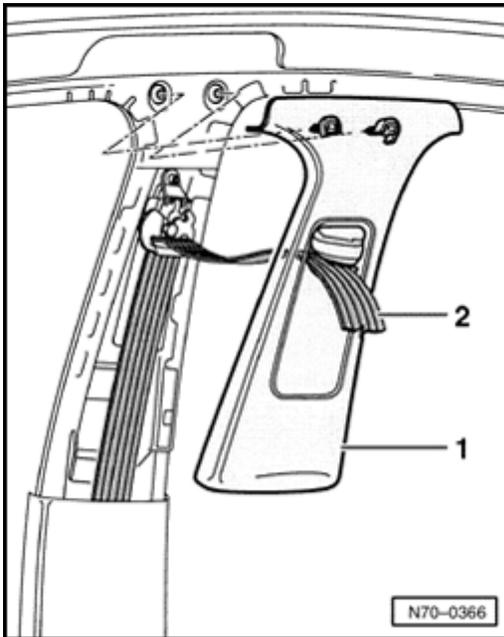



A

- Fold handle -1- down.


- Pry off covers -2- with screwdriver and fold up.

- Unscrew Phillips-head screws -3- and remove handle -1-.

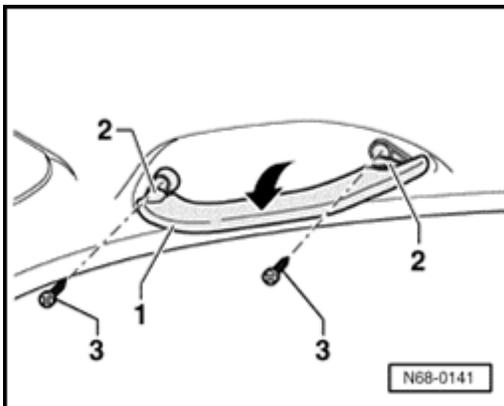

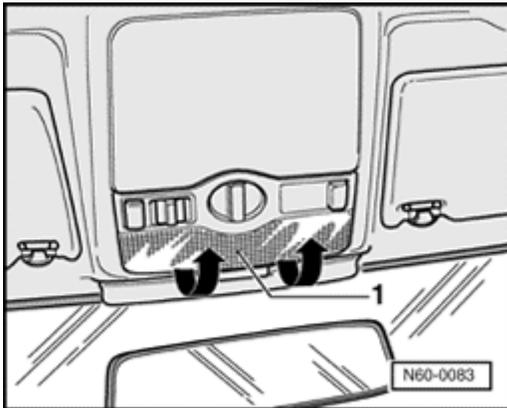

- A
- Unclip trim -1- in direction of arrow and remove.

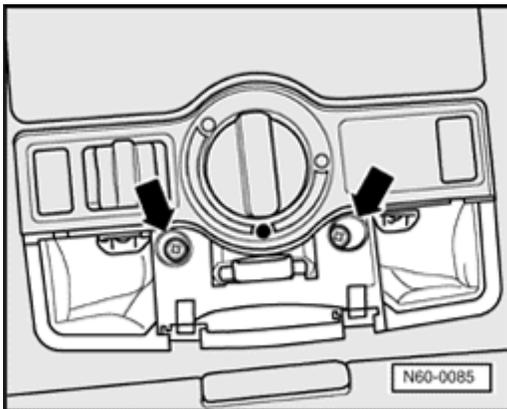


- A
- Unscrew screws (arrows) and remove controller.
 - Unclip connector and disconnect.



Removing sun visor

A


- Unhook sun visor -1- from mount -2-.
- Pry off cap -6-.
- Remove screw -5-.
- Unhook sun visor bearing -4- from mount and disconnect connector -3-.
- Pry off cap -7-.
- Remove bolts -8- and remove mount -2-.

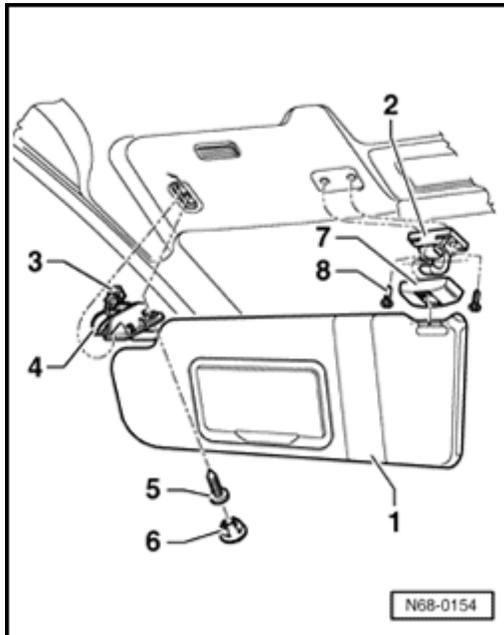


Removing interior light

A

- Pry out interior light -1- and separate connector.

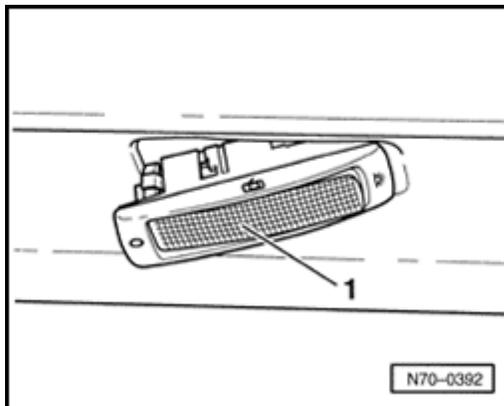

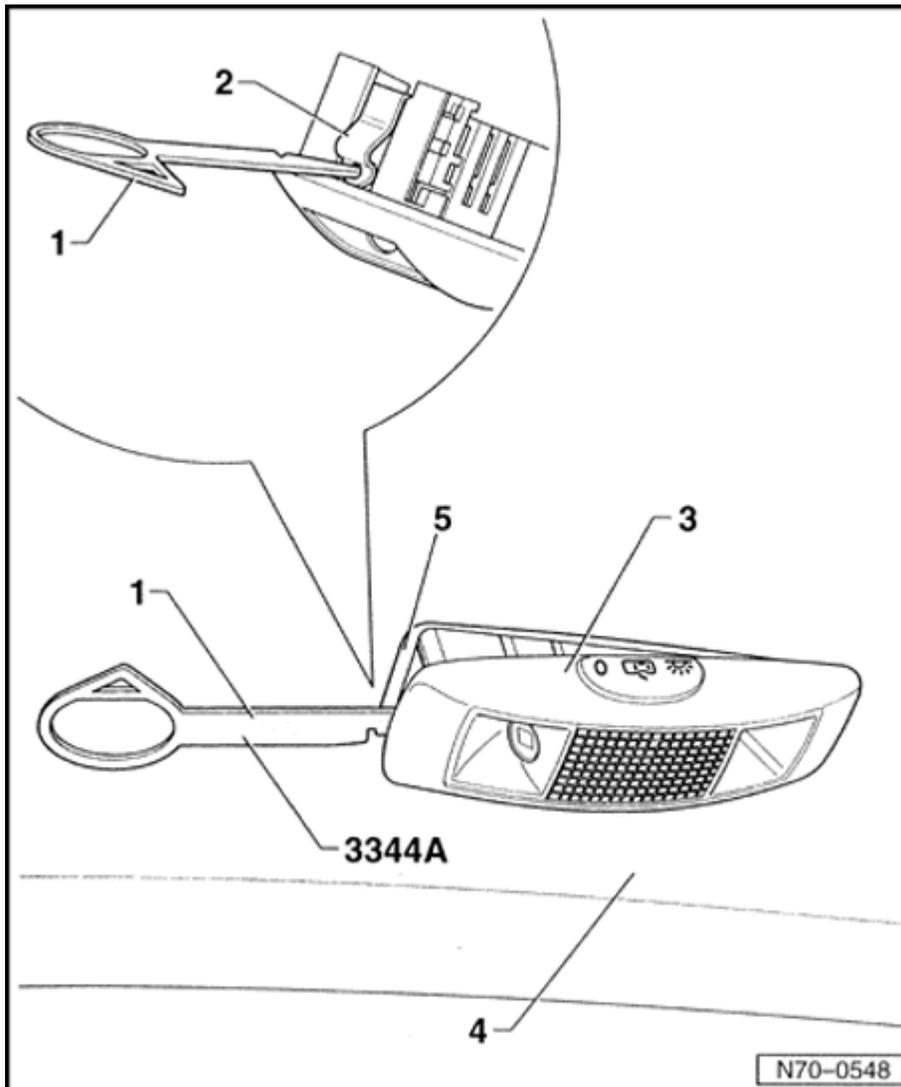


Reading light with interior monitoring, removing

- With the unlocking tool -1- press spring of reading light -2- to the back.
- Remove reading light -3- and disconnect connector.

Note:


Make sure that when pressing the spring -2- the release tool -1- does not enter between the headliner -4- and the metal frame in the headliner -5-.

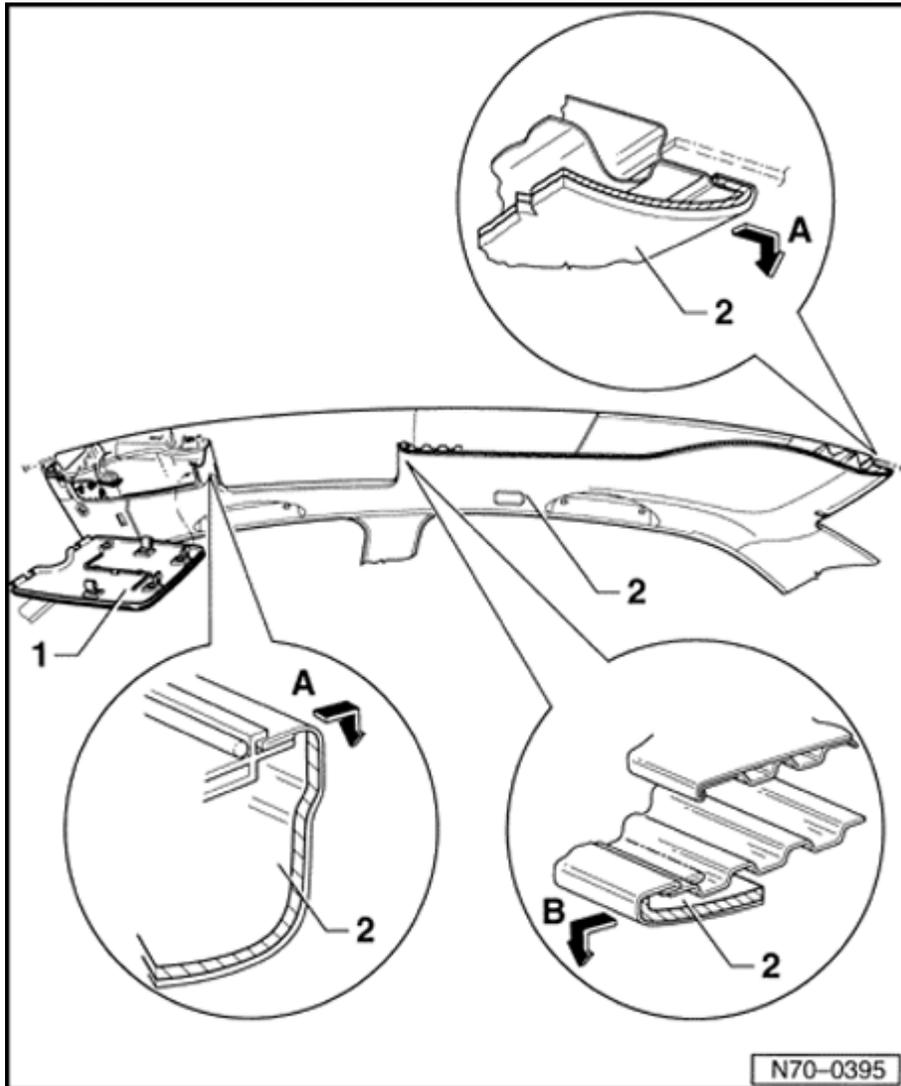

1 - Cover for sunroof drive motor

2 - Molded headliner

- Slide molded headliner -2- to the rear, pull down front and rear (arrows -A-).
- Push molded headliner -2- to the front and lower (arrow -B-).

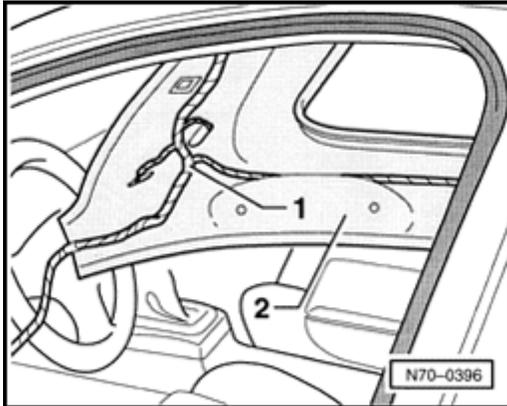

A

- Remove wiring harness -1- from lowered molded headliner -2-.



Installing

- Install in reverse order of removal.

Notes:

- ◆ *When installing, the wiring harness must be bonded securely again to the molded headliner. For bonding, a commercial adhesive pistol can be used.*
- ◆ *After connecting the battery make sure that the vehicle equipment (radio, clock and power window regulators) are checked according to repair manual and/or operating instructions.*



Molded headliner with sunroof, removing and installing (wagon)

CAUTION!

***Before working on electrical system,
disconnect battery Ground strap.***

Removing

Notes:

- ◆ *Before disconnecting the battery, obtain radio anti-theft code.*
 - ◆ *Depending on vehicle equipment, variations of the removing and installing procedure must be considered.*
- Remove upper A-pillar trim ⇒ [page 70-27](#) .
 - Remove upper C-pillar trim ⇒ [page 70-46](#) .
 - Remove upper D-pillar trim ⇒ [page 70-50](#) .




Removing upper B-pillar trim

A

- Unclip upper trim -1- at -B-pillar first at the sides, then at the upper area of the B-pillar.


2 - Seat belt


Removing handles (roof)

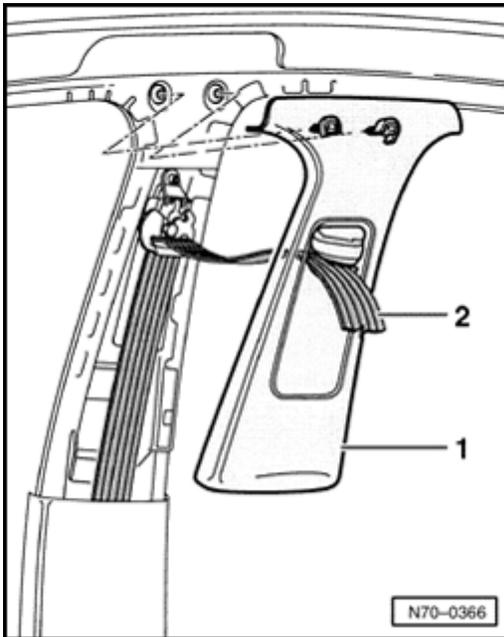


A

- Fold handle -1- down.
- Pry off covers -2- with screwdriver and fold up.
- Unscrew Phillips-head screws -3- and remove handle -1-.

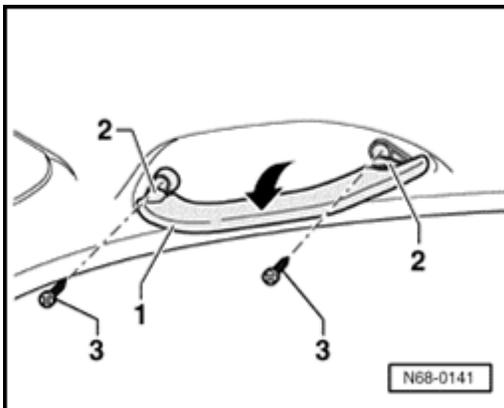

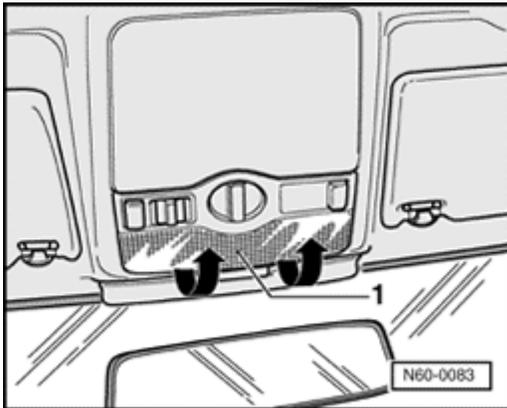

- A
- Unclip trim -1- in direction of arrow and remove.

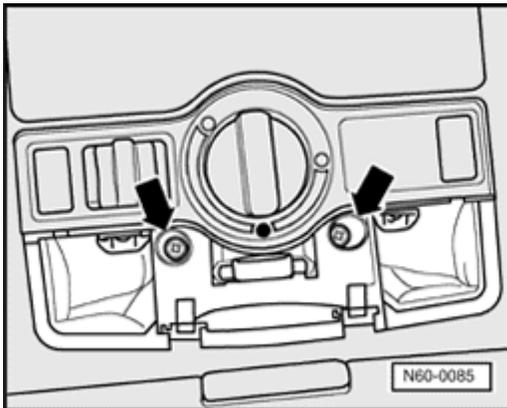


- A
- Unscrew screws (arrows) and remove controller.
 - Unclip connector and disconnect.



Removing sun visor

A


- Unhook sun visor -1- from mount -2-.
- Pry off cap -6-.
- Remove screw -5-.
- Unhook sun visor bearing -4- from mount and disconnect connector -3-.
- Pry off cap -7-.
- Unscrew two bolts -8- and remove mount -2-.

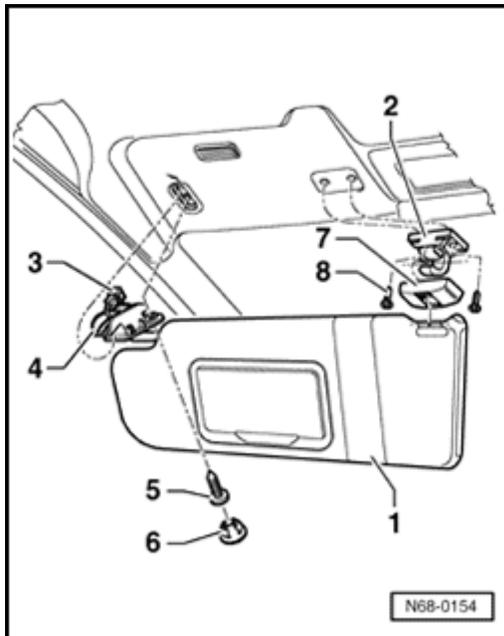


Removing interior light


A

- Pry out interior light -1- and separate connector.

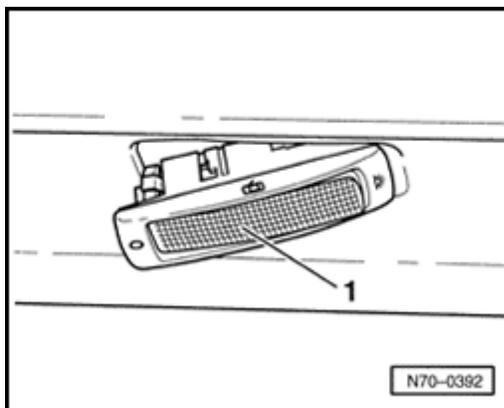

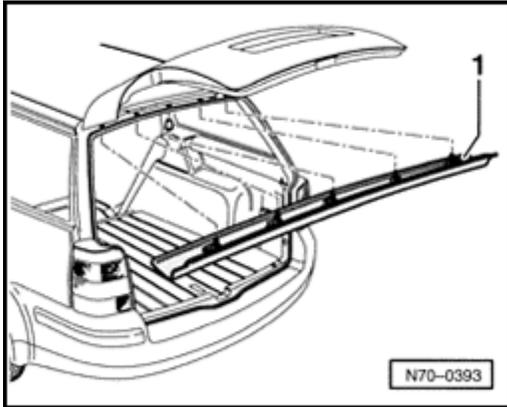


A - Unclip cover strip -1-.

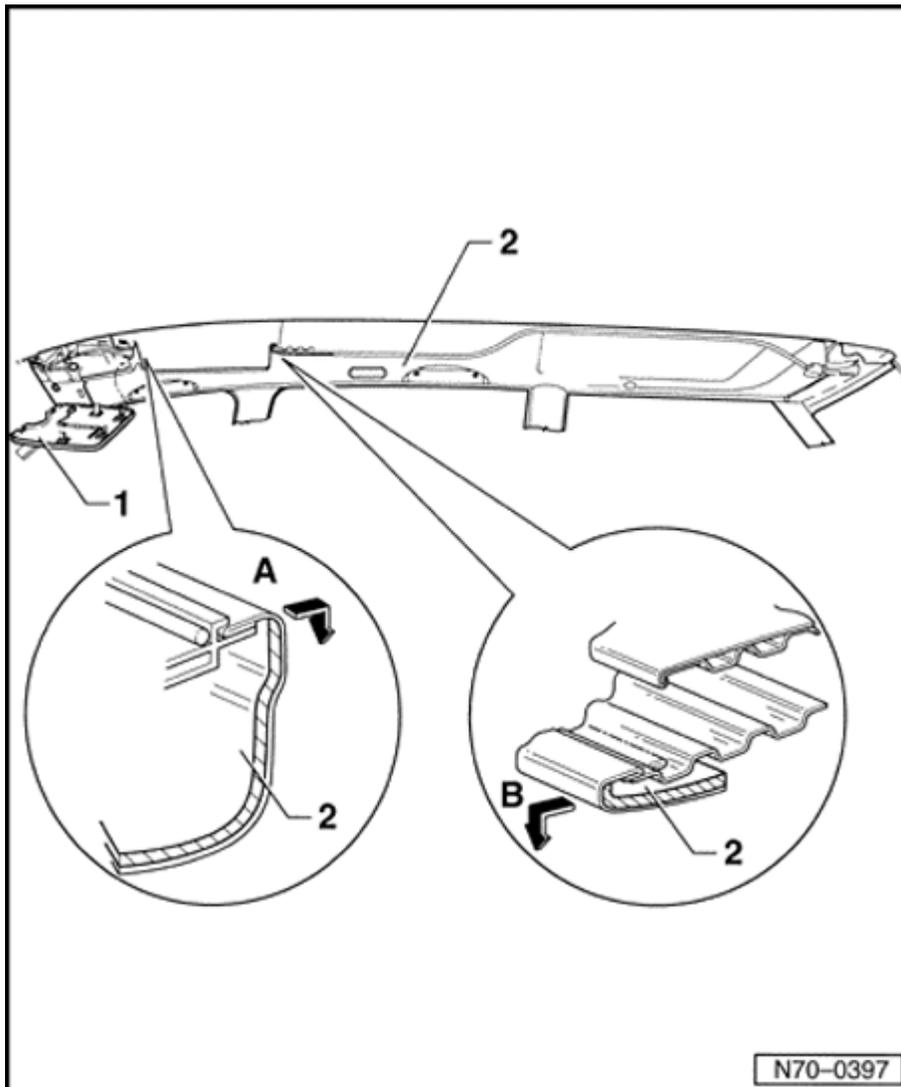

1 - Cover for sunroof drive motor

2 - Molded headliner

- Slide molded headliner -2- to the rear, pull front and rear down (arrow -A-).
- Push molded headliner -2- to the front and lower (arrow -B-).

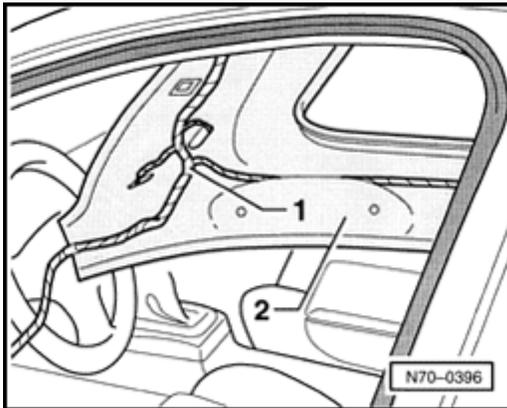

A

- Remove wiring harness -1- from lowered molded headliner -2-.



Installing

- Install in reverse order of removal.

Notes:

- ◆ *When installing the wiring harness must be bonded securely again to the molded headliner. For bonding, a commercial adhesive pistol can be used.*
- ◆ *After connecting the battery make sure that the vehicle equipment (radio, clock and power window regulators) are checked according to repair manual and/or operating instructions.*